

膜片式气泵 Diaphragm Pumps for Gas

DA60BLDC 系列(Series DA60BLDC)

特点 Features


- 无油润滑 Oil-Free
- 耐腐蚀性 Corrosionresistant
- 免维护 Maintenance Free
- 低噪音低振动 Low noise level&vibration
- 可以任何方向安装 Can be mounted in any plane

- 结构紧凑 Compact size
- 长寿命 Long life
- 重量轻 Low Weight
- 低功耗 High efficiency
- 无刷电机 BLDC Motor

应用 Typical Applications

- 气体采样分析 Gas detection devices
- 监护仪 Patient Monitoring
- 血压计 Blood Pressure Monitor
- 气压按摩 Gas massage products
- 实验室设备 Lab equipment
- 洗板设备 Microplate Washer
- 环境检测 Air Sampler
- 止血带 Automatic Tourniquet

- 污水处理 Sewage disposal
- 喷绘打印 Wide-Format Printer
- 生化仪 Bio-Chemical Analyzer
- 电解质 Electrolyte
- 美容设备 Beauty equipment
- 化学分析 Chemistry analysis
- 真空吸取 Vacuum transfer
- 消毒柜 Autoclave

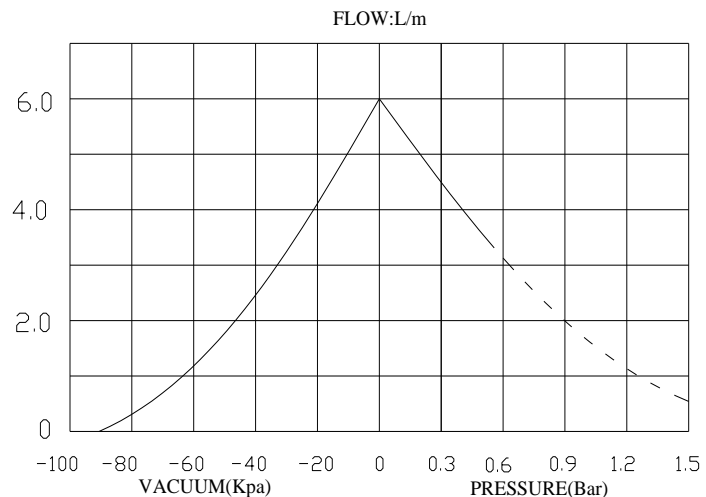

技术参数 Technical Data

额定电压 Rated voltage	DC12V	DC24V
额定电流 Rated current	0.8A	0.4A
空载流量 Free flowing	8.0L/M	8.0L/M
最大压力 Max. pressure	1.4Bar	1.4Bar
最大真空度 Max. vacuum	-70KPa	-70KPa
使用温度 Ambient temperature	0-40 ℃	0-40 ℃
重量 Weight		

- 可以在任何方向安装使用 Can be mounted in any plane
- 真空和压力均可 applicable as vacuum pump or pressure pump

材质: Parts in contact with medium Option

- 泵头 Pump head: PA66 or PPS
- 膜片/阀片 Diaphragms, valves: EPDM

外形尺寸: Dimensions(mm)

